

### **REMARKS**

Claims 1-16 are now pending in the present application, of which only claim 14 has been amended. Claims 1 and 16 are independent. The Abstract has been amended. Reconsideration of this application, as amended, is respectfully requested.

#### **Amendments to the Abstract of the Disclosure**

The Abstract of the Disclosure has been amended as requested by the Examiner.

#### **Rejection Under 35 U.S.C. § 112**

Claims 8, 9, and 14 stand rejected under 35 U.S.C. § 112, second paragraph, as being indefinite for failing to particularly point out and distinctly claim the subject matter which applicant regards as the invention. This rejection is respectfully traversed.

Regarding claim 8, the Examiner has stated that the term “natural direction” is not defined. Applicant respectfully notes that paragraph [0016] specifically defines “natural direction.” Therefore, one of ordinary skill in the art will be able to ascertain the scope of claim 8.

Regarding claim 9, the Examiner states that the phrase “the receiving body acts as a gathering element for the strands between the embracing element and the terminating sleeve” is unclear because it is not known how the receiving body acts between itself and another element. Applicant respectfully submits that, as claimed, the receiving body is arranged **between the embracing element** and the **terminating sleeve**. Therefore, the receiving body has not been defined with respect to itself as the Examiner alleges. Furthermore, an exemplary arrangement is shown in

Figs. 2-4, where the receiving body 16 is located between the embracing element 17 and a terminating sleeve 9.

Regarding claim 14, the Examiner has objected to the meaning of the phrases “radially outer surface” and “radially inner surface.” In order advance prosecution of this application, claim 14 has been amended to delete the term “radially.”

Applicant respectfully submits that the Examiner’s § 112 rejections have been traversed or rendered moot. Reconsideration and withdrawal of the Examiner’s rejections under 35 U.S.C. § 112 are therefore respectfully requested

### **Rejections Under 35 U.S.C. § 103**

Claims 1 and 8-16 stand rejected under 35 U.S.C. § 103(a) as being unpatentable over Paulshus ‘560, WO 02/057560 in view of Dufosse, U.S. Patent No. 3,967,421. Claim 2 stands rejected under 35 U.S.C. § 103(a) as being unpatentable over Paulshus ‘560 and Dufosse and in further view of Willes, GB 2,091,770.

Claims 1, 8-11, and 16 stand rejected under 35 U.S.C. § 103(a) as being unpatentable over Daiguji, U.S. Application Publication No. 2001/0039686 in view of Williams, U.S. Patent No. 5,525,003 and Shigley & Mischke. Claim 2 stands rejected under 35 U.S.C. § 103(a) as being unpatentable over Daiguji, Williams, and Shigley & Mischke, and further in view of Willes. Claims 12, 13, and 15 stand rejected under 35 U.S.C. § 103(a) as being unpatentable over Daiguji, Williams, and Shigley & Mischke, and further in view of Dufosse. Claims 6 and 7 stand rejected under 35

U.S.C. § 103(a) as being unpatentable over Daiguji, Williams, and Shigley & Mischke, and further in view of Alznauer, U.S. Application Publication No. 2002/0121390.

These rejections are respectfully traversed.

The Paulshus '560 combinations

Applicant notes that Paulshus '560 published on July 25, 2002, which is less than one year before Applicant's international filing date of January 22, 2003 and after Applicant's foreign priority date of January 22, 2002. As noted in the Verification of Translation filed herewith, WO 03/062551 A1 is an unamended and true English language translation of NO 20020406. Therefore, Paulshus '560 does not qualify as § 102(a) prior art, but does have a § 102(e) effective filing date of December 20, 2001.

Because Paulshus '560 only qualifies as prior art under 35 U.S.C. § 102(e) and Paulshus '560 and the current application were owned by the same person or subject to an obligation of assignment to the same person at the time the present invention was made, Paulshus '560 cannot preclude patentability under 35 U.S.C. § 103(a) (see 35 U.S.C. § 103(c)).

Therefore, Applicant respectfully request reconsideration and withdrawal of the § 103(a) rejections of claims 1, 2, and 8-16 over Paulshus '560 in view of the other cited references. Because claim 14 was previously indicated as being allowable if rewritten in independent form and it has been amended to overcome the new § 112 rejection, Applicant believes that claim 14 remains allowable.

Furthermore, Applicant notes that Dufosseze is directed to a tie formed of stressed high tensile steel tendons that are enclosed in a protective sheath filled with hardened material, as stated in the abstract. Referring to Fig. 1, anchor plate 6 is traversed by tendons 1 and these tendons are held against the external face of anchor plate 6 by grips 7 of **known type**. See col. 3, lines 15-18 (emphasis added). Applicant submits that such grips for steel tendons are normally cylindrical sleeves that are crimped onto the steel tendons by use of a tool having the ability to provide massive radial forces in order to crimp the sleeve fixedly to the steel tendon. As such, grips 7 could never be used on the non-metallic, smooth rods of composite material of the present invention because such radial forces would likely crush the rods. Thus, in the present invention, composite rods are glued or molded fixedly to the sleeve by pouring liquid epoxy into the tapered hole 9a provided in the sleeve 9. See paragraph [0043] of present application. Clearly, the grips 7 of Dufosseze are different from the terminating sleeves of the present invention, and therefore one of ordinary skill in the art would not look to Dufosseze to teach adding grips to the strands disclosed in Paulshus '560.

#### The Daiguji combinations

The present invention is directed to an end termination for a tension leg. Independent claim 1 is directed to an embodiment of the present invention and recites a combination of elements including the recitation "the free end of each strand is fixed to and enclosed by a terminating sleeve having a diameter larger than a corresponding aperture in the receiving body, the terminating sleeve loosely resting on or abutting the receiving body." Independent claim 16 is directed to an embodiment of the present invention and recites a combination of elements including "the free end

of each strand being fixed to and enclosed by said terminating sleeve, said terminating sleeve loosely resting on or abutting the receiving body.” Applicant respectfully submits that the combination of references relied on by the Examiner fail to teach or suggest independent claims 1 and 16 of the present invention.

At the outset, it is noted that Daiguji describes Fig. 8 as being prior art and therefore Fig. 8 does not constitute the teachings of Daiguji. In other words, the arrangement shown in Fig. 8 suffers from some problem that Daiguji is trying to solve and one of ordinary skill in the art would not be motivated to combine the prior art of Fig. 8 with the invention set forth by Daiguji. In the rejection of independent claims 1 and 16, the Examiner inexplicably combines the prior art arrangement with Daiguji’s invention.

For at least this reason, the rejection of independent claims 1 and 16 cannot be maintained.

Furthermore, Daiguji describes two arrangements for a bridge cable fixing wire. The first arrangement, as seen in Fig. 2 and described in paragraph [0028], comprises a plurality of cables 3, each formed of PC twisted steel wires 4. These cables are fixed against a fixing plate 2 by a press fixing grip 5. Each of the press fixing grips 5 is engaged with and integrally formed with fixing plate 2. As described in paragraph [0032], the press fixing grips 5 are fixed to the PC twisted steel wires 4 by a press and fitting machine.

The second arrangement, which is disclosed as being prior art, comprises press fixing grips 5’ that are fixed to an outer side of a terminal end of each PC steel twisted wire 4’ and the ends of the press fixing grips 5’ are engaged with an edge of each insertion hole formed in the fixing plate 2’. *See* paragraph [0005].

Williams structurally discloses an arrangement similar to Daiguji's first arrangement. For example, as seen in Figs. 1-3, Williams discloses a cord 40 that is embedded in a potted termination 41. The potted termination 41 is formed with "a particular outer contour to interface with the inner surface 34 of the shoe 30." As described, Williams discloses cord 40 that is embedded in the potted termination 41 as opposed to being press fit into the potted termination. The reason for doing so is that "the fibers tend to be rather brittle in the transverse direction in spite of their great longitudinal strength. Thus, **clamping** type devices which impose high compressive forces on the cable are not very suitable as they are likely to damage the fibers." *See* col. 1, lines 28-33 (emphasis added).

While both Williams and the first arrangement of Daiguji disclose arrangements where end portions of cables and/or rods are constrained by fixing grips and/or potted terminations in fixing plates and/or shoes. It would not be obvious to modify Daiguji to include fiber composite cables because the manner of attaching the press fixing grip 5 to the cable would damage the cable. In view of this, one having ordinary skill in the art would not look to modify the Daiguji reference with composite rods as in the presently claimed invention.

With regard to dependent claims 2 and 6-13, and 15, Applicant respectfully submits that these claims are allowable due to their dependence upon allowable independent claim 1, as well as due to the additional recitations in these claims.

With regard to the Examiner's reliance on the Shigley & Mischke, Dufosse and Alznauer et al. references, these references also fail to disclose any sufficient motivation to modify Daiguji to use terminating sleeves as claimed. Therefore, these references fail to make up for the deficiencies of Daiguji and Williams.

In view of the above amendments and remarks, Applicant respectfully submits that claims 1, 2, and 6-16 clearly define the present invention over the references relied on by the Examiner. Reconsideration and withdrawal of the Examiner's rejections under 35 U.S.C. § 103 are therefore respectfully requested.

#### **Allowable Subject Matter**

Claims 3-5 have been indicated by the Examiner as being allowable if rewritten in independent form. Applicant greatly appreciates the indication of allowable subject matter by the Examiner. However, claims 3-5 have not been rewritten in independent form at this time, since it is believed that independent claim 1 is in condition for allowance for the above reasons. Applicant reserves the right to present claims 3-5 in independent form at a later date if it is so desired.

#### **CONCLUSION**

Since the remaining references cited by the Examiner have not been utilized to reject the claims, but merely to show the state-of-the-art, no further comments are deemed necessary with respect thereto.

All the stated grounds of rejection have been properly traversed and/or rendered moot. Applicant therefore respectfully requests that the Examiner reconsider all presently pending rejections and that they be withdrawn.

It is believed that a full and complete response has been made to the Office Action, and that as such, the Examiner is respectfully requested to send the application to Issue.


In the event there are any matters remaining in this application, the Examiner is invited to contact Chad D. Wells, Registration No. 50,875 at (703) 205-8000 in the Washington, D.C. area.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. §§ 1.16 or 1.17; particularly, extension of time fees.

August 9, 2006

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By   
Paul C. Lewis, #43,368

*CDW*  
PCL/CDW/ljr

P.O. Box 747  
Falls Church, VA 22040-0747  
(703) 205-8000





(PATENT)  
4566-0107PUS1

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant:	Bjorn PAULSHUS	Conf.:	2371
Appl. No.:	10/501,482	Group:	3679
Filed:	August 16, 2004	Examiner:	MILLS, Daniel J.
For: END TERMINATION OF TENSION LEG			

**VERIFICATION OF TRANSLATION**

I, Knut B. Byklum, of Protector IP Consultants AS, Oslo, Norway, hereby solemnly declare:

That I am familiar with the Norwegian and English languages;

That the International Patent Application PCT/NO03/00019 filed 30 March 2005 having publication number WO 03/062551 A1 (a copy of WO 03/062551 A1 is attached hereto) is an unamended and true English translation of the priority founding Norwegian language patent application NO 20020406; and

That all statements made herein of my own knowledge are true and all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

August 1st, 2006  
Date

Knut B. Byklum  
Signature

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)


PCT

(10) International Publication Number  
WO 03/062551 A1

- (51) International Patent Classification<sup>7</sup>: E04C 5/12, [NO/NO]; Snekkerstuveien 56, N-2020 Skedsmokorset (NO).  
B63B 21/50, E01D 19/14
- (21) International Application Number: PCT/NO03/00019 (74) Agent: PROTECTOR INTELLECTUAL PROPERTY CONSULTANTS AS; P.O. Box 5074 Majorstuen, N-0301 Oslo (NO).
- (22) International Filing Date: 22 January 2003 (22.01.2003)
- (25) Filing Language: English (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data: 20020406 25 January 2002 (25.01.2002) NO
- (71) Applicant (for all designated States except US): DEEP WATER COMPOSITES AS [NO/NO]; P.O. Box 94, N-1325 Lysaker (NO).
- (72) Inventor; and (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
- (75) Inventor/Applicant (for US only): PAULSHUS, Bjørn

[Continued on next page]

(54) Title: END TERMINATION MEANS IN A TENSION LEG AND A COUPLING FOR USE BETWEEN SUCH AN END TERMINATION AND A CONNECTING POINT

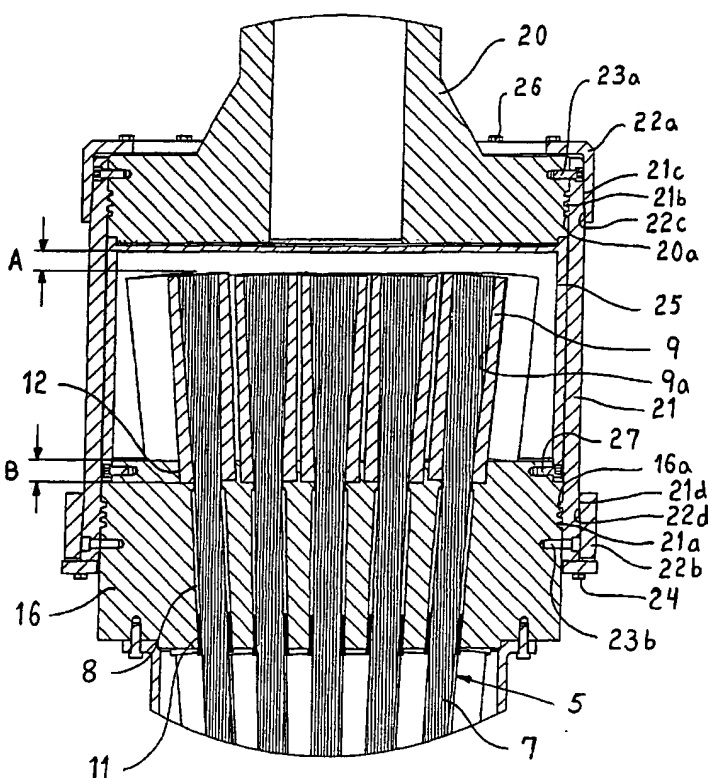

(57) Abstract: An end termination means for tension legs (10) of non-metallic materials like composite material is disclosed. The tension leg (10) is constructed of a number of strands (5) that constitute the load carrying elements of the tension leg (10). The strands (5) are twisted (laid) about the longitudinal axis of the tension leg (10) by a predetermined laying length and each strand (5) is in turn constructed of a plurality of rods (7) of composite material having embedded strength fibres. The rods (7) are in turn twisted about each other like in a wire rope. The strands (5) terminate near a receiving body (16) having connecting means and a number of through-going apertures enclosing the respective strands. Each strand (5) is passed through respective aperture (8) in the receiving body (16) without being fixed therein.

BEST AVAILABLE COPY

WO 03/062551 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,  
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii)) for the following designations AE,  
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,

VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS,  
MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent  
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent  
(AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB,  
GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI  
patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,  
MR, NE, SN, TD, TG)

**Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**END TERMINATION MEANS IN A TENSION LEG AND A COUPLING  
FOR USE BETWEEN SUCH AN END TERMINATION AND A CONNECTING POINT**

The present invention relates to an end termination means for tension legs of non-metallic materials like composite material, which tension leg is constructed of a number of strands that constitute the load carrying elements of the tension leg, which strands are twisted (laid) about the longitudinal axis of the tension leg by a predetermined laying length and each strand is in turn constructed of a plurality of rods of composite material having embedded strength fibres where the rods are twisted about each other like in a wire rope, and the strands terminate near a receiving body having connecting means and a number of through-going apertures enclosing the respective strands.

Tension legs of the above described nature are known from NO 20002812. An end termination means is known from NO 20002811. An end termination means is also described in WO 02/057560 with the same applicant as to the present invention.

The end termination according to the invention is in particular developed in view of tension legs that anchor a tension leg platform. Other uses, however, are also of interest, e.i. vertical stays of suspension bridges and similar stays that need to be able to transfer heavy axial forces/loads.

The advantages with tension legs of composite material is low weight, great load carrying capacity in regard of weight/volume, substantially less prone for fatigue, which means that there is no need for bending restrictors, in addition to be very competitive regarding price/cost. Moreover they have the excellent quality of being able to be coiled onto reels having diameter down to 4 meters.

Tension legs of steel find their limitation in regard of longitudinal extension, i.e. depths of the ocean, because tension legs are designed as tubulars or pipes in order to reduce the weight in water, preferably so that the tension legs become next to "weightless" when submerged in water. At greater depths it is necessary to increase the wall thickness to avoid buckling due to the external water pressure.

The later solutions with tension legs of composite material are also considered used when an existing tension leg platform, which is anchored by tethers of steel, is to be transferred to deeper waters. The steel tethers can then be cut off and replaced with tension legs of composite material.

5

Of particular concern when composite material is used to transfer forces in load carrying elements, is that the main stresses extend axially within the load carrying elements and that shear stresses should hardly appear.

10 With the solution shown in NO 20006643 each strand terminates within a receiving body. In order to fix the strands in a secure manner within the receiving body, it was proposed to make conical inclined apertures in the receiving body. It has now been recognised that the working process for making such apertures are very complicated and expensive.

15

Additionally, it has been a desire to provide a certain degree of motional freedom to the terminating area of the strands. During reeling of the tension leg, primarily for transportation purposes, a mutual displacement between the strands will take place. This results in that some of the strands tend to be retracted into the tension leg, while others  
20 will be pushed out at the end termination. This may provide undue compression stress within the composite material for those strands being pushed out if this motion is prevented.

It is also desired with a certain motional freedom with regard to direction. This is  
25 substantiated from the dynamic loading that the tension legs are exposed to when installed. During altering tensile stresses in the tension leg, the tension leg tends to twist about its own longitudinal axis. Thus each individual strand tends to change direction, though it is to be understood that we speak of small angular deviations.

30 According to the present invention the above mentioned conditions are taken care of by a means of the introductorily described type, which is distinguished by that each strand is passed through respective aperture in the receiving body without being fixed therein, that each strand has a free end terminating some distance above the receiving body, and

that the free end of each strand is fixed to and enclosed by a terminating sleeve having a diameter larger than a corresponding aperture in the receiving body, which terminating sleeve is loosely resting on or abutting the receiving body.

- 5 In order to obtain secure anchoring of the strands, the terminating sleeve is preferably internally tapered in a direction towards the receiving body.

In order to take care of the motion of the individual strands within the receiving body, a guiding sleeve is suitably arranged in each aperture of the receiving body. Preferably  
10 the guiding sleeve is shorter than the length of the aperture in the receiving body. In a preferable embodiment, each guiding sleeve is provided near the entry of the strand into an aperture of the receiving body.

In order that the terminating sleeve is to return to the same resting surface on the  
15 receiving body, each aperture through the receiving body may preferably terminate in a concentric recess for receipt of and to act as a guide and seat for the terminating sleeve.

In a preferable embodiment the end termination means may include an embracing element that is spaced apart from the receiving body and keeps the strands together.  
20 Between the embracing element and the receiving body the strands extend less radial restriction and in a substantially natural direction towards and into the apertures of the receiving body.

By "natural direction" is the following meant. Up to the embracing element the tension  
25 leg extends as a compact string having twisted (laid) strands that are kept together by means of an outer sheath. From the embracing element and further up to the receiving body, the outer sheath is removed. If one temporarily disregards the receiving body, the strands will, when passing out from the embracing element, adopt a natural direction. This natural direction implies that the twisted configuration discontinues and transforms  
30 into a rectilinear configuration. The direction of each individual strand, however, will extend obliquely with respect to the longitudinal axis of the tension leg. Expressed in a different way, the strands continue toward the receiving body by a direction extending tangential to helical line of the strands in the tension leg. And, to be noticed, in addition

to this oblique direction, the strands will moreover simultaneously diverge from the longitudinal axis of the tension leg. This direction of the strands is adopted quite natural as a consequence to that the restriction ceases at a particular place.

5 This recognition was exploited to avoid the introduction of shear stresses in the strands. The apertures in the receiving body are placed at such radial distance from the longitudinal axis of the tension leg that they correspond with the divergence of the strands at the same time as they are adapted to their inclined direction and rotational orientation.

10

Examples of embedded strength fibres that can be used as rods in the strands are fibres of carbon, kevlar, glass or aramid.

In a preferable embodiment the apertures in the receiving body can be somewhat  
15 inclined relative to the longitudinal axis of the tension leg, and preferably the inclination corresponds with the natural direction of the strands between the embracing element and the terminating sleeves.

The end termination may preferably include an external rigid sleeve that is fixed in one  
20 end thereof to the receiving body and in the other end to the embracing element.

For further connection, the receiving body can have at least one annular groove provided on the outer surface thereof for engagement with at least one first annular rib on a connecting part interconnected to an anchor point.

25

Further the anchor point can have at least one external annular groove for engagement with at least one second annular rib provided on the connecting part a distance apart from the at least one first rib, which connecting part is radially fixed by a surrounding connecting part.

30

According to the present invention, also a coupling for use between an end termination and an anchor point as described above is provided, which coupling is distinguished in that the radially outer surface of the connecting part has an upwards directed conical

form and the radially inner surface of the surrounding connecting part has a complementary conical form.

Conveniently the connecting part can include pin bolts for temporary fixation of the  
5 connecting part to the anchor point.

Other and further objects, features and advantages will appear from the following description of one for the time being preferred embodiment of the invention, which is given for the purpose of description, without thereby being limiting, and given in  
10 context with the appended drawings where:

Fig.1 shows a cross sectional view of a typical tension leg for use with the present invention,

Fig. 2 shows a side elevation view of the end termination according to the invention,

15 Fig. 3 shows longitudinal sectional view of the end termination along line A-A in fig. 2,

Fig. 4 shows in closer detail an end termination means according to the invention,

Fig. 5A shows in detail, from above, how the strands in the tension leg terminate within the end termination means when free-standing,

Fig. 5B shows in detail, from below, how the strands in the tension leg terminate within  
20 the end termination means when free-standing, and

Fig. 6 shows another sectional view of a tension leg for use with the present invention.

Reference is first made to fig.1 that illustrates an example of how a tension leg 10' of this nature normally is constructed. The tension leg 10' has an enclosing and gathering  
25 sheath 1 of a heavy duty and resistant material, such as polyethylene. Spacer elements in form of different profiles in several layers are arranged within the sheath 1, first an outer profile 2, next an intermediate profile 3 and then an inner profile 4. These profiles have no load carrying properties and only act as spacing elements. They may, as an example, be manufactured of PVC. The profiles 2, 3, 4 create between them cavities  
30 that receive respective strands 5', 6, which are the load carrying elements in the tension leg 10'. Each strand 5', 6 is in turn constructed of a number of rods 7', which are manufactured of a composite material having embedded strength fibres. The figure



shows strands 5', 6 of different dimensions. Each of the seven strands 5' is made up of 85 rods 7' and each of the six strands 6 is made up of 31 rods 7'.

It is the individual rods 7' within the strands 5', 6 that transfer the forces/loads within the tension leg 10'. The embedded strength fibres may be fibres of carbon, kevlar, glass or aramid.

Reference is now made to fig. 6 that illustrates a second embodiment of a tension leg 10 that is in particular developed for use with the present end termination 15. Here, all the strands 5 are of same dimension and the tension leg 10 is constructed as a bundle consisting of 31 strands 5. In addition, and as usual, spacer elements are provided between the strands 5. Each strand 5 is made up of 85 rods 7, which in turn constitute the individual load-carrying elements. This circumstance that all the strands 5 have the same dimension and construction simplifies the design of the end termination 15 and the assembly thereof. The further description of fig. 2-4 refers to a tension leg 10 according to fig. 6, though the invention can easily be adapted and used for the tension leg of fig.1.

Fig. 2 and 3 show the end termination 15 of the tension leg 10. The end termination 15 is designed for connection to either an anchorage point 20 on a tension leg platform or similar on the seabed. The end termination 15 comprises a terminating receiving body 16 having external connecting means for connection to the anchorage point 20. The receiving body 16 is in the form of a heavy plate having substantial thickness. A number of apertures 8 corresponding to the number of strands 5 are drilled substantially in axial direction through the receiving body 16. The strands 5 are passed into and partially through the receiving body 16 and terminate here. How the strands 5 interact with the receiving body 16 will be more fully described with relation to fig. 4.

At the opposite end of the end termination 15 and spaced apart from the receiving body 16, an embracing element 17 is provided. The embracing element 17 is in the form of a gathering sleeve that embraces and collects the strands 5 of the tension leg 10. Between the embracing element 17 and the receiving body 16, an outer sleeve 18 is arranged. The outer sleeve 18 connects the embracing element 17 and the receiving body 16 to a bending stiff and rotary stiff unit.

- In the entire longitudinal extension of the tension leg 10 the strands 5 are twisted (laid) by a predetermined laying length about the longitudinal axis of the tension leg 10. By "laying length" is meant the number of revolutions about the longitudinal axis per length unit. For the illustrated tension leg 10 typical values will be like one revolution per 8 meters. The individual rods 7 within each strand 5 are in turn twisted about the longitudinal axis of the strand 5 in the same way as in a wire rope. The laying length for the rods 7 is typically 4 meters.
- 10 The embracing element 17 has an internal surface 17a formed as a flared funnel facing towards the tension leg 10 proper. The internal surface 17a may have a radius of curvature of 10 meters as an example. It can be larger or smaller depending on the detail of construction. This curvature shall provide for that the tension leg 10 receives a controlled bending against the internal surface 17a of the embracing element 17 if the tension leg 10 is exposed to a lateral force. Such a lateral force will always arise because a flexible element in the tension leg connector proper is attempting to prevent lateral motion when the tension leg 10 adopts an inclined position during lateral displacement of the platform.
- 20 When the individual strands 5 pass out of the embracing element 17 in a direction toward the receiving body 16, the strands 5 will be without any radial restriction and adopt a substantially natural direction toward and into the apertures 8 in the receiving body 16. This natural direction implies that the twisted configuration of the strands 5 ceases and transforms to a rectilinear configuration. However, the direction of each strand 5 will extend obliquely to the longitudinal axis of the tension leg 10. Said in a different way, the strands 5 extend toward the receiving body 16 by a direction that extends tangential to the helical line of the strands 5 in the tension leg 10. And, to be noticed, in addition to this oblique direction, the strands 5 will simultaneously diverge from the longitudinal axis of the tension leg 10. This direction of the strands 5 is quite naturally adopted as a consequence of that the gathering and twisting cease at the exit from the embracing element 17.

Reference is now made to fig. 4. The receiving body 16 has as mentioned a number of apertures 8, corresponding to the number of strands 5 drilled or formed substantially axially therethrough. Each strand 5 is passed through respective aperture 8 and one terminating sleeve 9, with a diameter larger than a corresponding aperture 8 in the receiving body 16, encloses and is fixed to the free end of the strand 5. The terminating sleeve 9 will normally be formed with an internal through-going hole 9a and the lower end thereof abuts the receiving body 16. Each terminating sleeve 9 rests loosely on the receiving body 16 when the tension leg 10 is not loaded. With advantage are respective recesses 12 formed in the receiving body 16 and are concentric to the respective apertures 8 of the body 16. Thus it is to be understood that the recesses 12 form guides and seats for the terminating sleeves 9 when the strands 5 are loaded.

As introductorily mentioned, during reeling of the tension leg 10 (for transportation purposes) a mutual displacement between the strands 5 will take place. This leads to that some of the strands 5 at the end termination tend to be pulled into the tension leg 10, while others are pushed out. As mentioned, this may provide undue compression stresses within the composite material for those strands 5 that are pushed out if this motion is prevented. This is solved in that the termination sleeves 9 are enabled to be displaced a distance A out of the receiving body 16. The distance A is selected somewhat longer than expected actual displacement of the strands 5 during reeling. The recesses 12 have a depth B that is chosen to be longer than the distance A. This because the terminating sleeves 9 shall not be able to be displaced completely out of the recesses 12 and in such a way that they are guided back to abutment in same seat when the strands 5 are loaded.

The final fixation of the strands 5 to the respective terminating sleeves 9 is typically made by gluing, i.e. that a liquid epoxy is poured into the holes 9a and around the strands 5 and are set to cure. The holes 9a may have any suitable form and will normally be tapered downwards, preferably conical or substantially conical. An assumed in particular favourable form of the holes 9a will be a downward directed progressive taper, i.e. that the longitudinal sectional profile of a hole 9a describes a (slight) curve or has a radius. During load the cured epoxy cone having the embedded

strand ends are pulled further into the conical holes 9a. A high hydrostatic pressure is created which further locks the strands 5 against slipping out of the sleeves 9.

5 The individual rods 7 in a strand 5 can conveniently, when they enter into a hole 9a in the terminating sleeve 9, be let loose so that they spread out, though modest, in this area. Thus the liquid epoxy will also fill out the space between the spread out rods 7 and the wedging action and the fixation within the conical holes 9a will be further improved.

10 Since the rods 7 are moulded or glued fixedly into the terminating sleeve 9, the transition between glued and not glued area is very vulnerable to lateral forces. In order to remedy this situation, guiding sleeves 11 for the strands 5 are provided in each aperture 8 in the receiving body 16. Thus the receiving body 16 also acts as a collecting element and replaces per se the gland 19 of the NO 20006643 reference. The length of the guiding sleeves 11 can vary and be adapted to the different applications.

15 The receiving body 16 including the guiding sleeves 11 are accurately positioned with respect to the embracing element 17 by means of fixation to the outer sleeve 18. Thus it is to be understood that the sleeve 18 locks the receiving body 16 and the embracing element 17 in mutual fixed position. This contributes to that the strands 5 arrive straight  
20 into the apertures 8, more precisely the guiding sleeves 11, in the receiving body 16 and pass further on straight into the holes 9a in the terminating sleeves 9 lateral forces in the vulnerable area where the glue terminates is avoided. An angular deviation of 1°, as example, where the strands 5 enter into the guiding sleeve 11 can be anticipated. The holes 9a in the guiding sleeves 11 will thus preferably be designed as a flared funnel  
25 facing towards the embracing element 17 and has a typical radius of curvature of approx. 10 meters. This implies that a controlled bending load in the strands 5 is achieved.

30 With advantage the apertures 8 in the receiving body 16 can be somewhat inclined relative to the longitudinal axis of the tension leg 10, and this inclined position must then correspond with that direction the strands 5 have towards the receiving body 16.

Fig. 4 also shows in closer detail a coupling for use between the end termination 15 and a connecting point 20 (anchor point). The receiving body 16 has on the outer surface thereof connecting means, here as an example shown in the form of three annular grooves 16a for interaction with three first annular ribs 21a on a connecting part 21  
5 connected to the connecting point 20.

The connecting part 21 can be made up of two, three, four or more segments that surround the receiving body 16 and the connecting point 20. Correspondingly the connecting point 20 has three external annular grooves 20a for engagement with three  
10 second annular ribs 21b provided on the connecting part 21 at a distance apart from the three first ribs 21a, the segmented connecting part 21 being radially fixed by an upper and lower surrounding, continuous connecting part 22a, 22b.

An upper radially outer surface 21c on the connecting part 21 has an upward directed  
15 conical form and a radially inner surface 22c on the surrounding upper connecting part 22a has a complementary conical form. A lower radially outer surface 21d on the connecting part 21 has an upward directed conical form and a radially inner surface 22d on the surrounding lower connecting part 22b has a complementary conical form. The connecting part 21 may include respective upper and lower pin bolts 23a, 23b for  
20 temporary fixation of the individual segments of the connecting part 21 to the connecting point 20 and the receiving body 16 respectively.

Further, a mechanical protective cap 25 is arranged over and around the terminating sleeves 9. The cap is fixed to the receiving body 16 by means of a number of threaded  
25 connections 27.

During assembly of the connector the receiving body 16, including installed cap 25, is firstly placed against the connecting point 20. Then the individual segments of the connecting part 21 are brought against the receiving body 16 and the connecting point  
30 20 such that the ribs 21a and 21b on the connecting part 21 engage the grooves 16a and 20a on the receiving body 16 and the connecting point 20 respectively. Each segment of the connecting part 21 is secured by the respective pin bolts 23a, 23b to the connecting point 20 and the receiving body 16.

Then the lower surrounding connecting part 22b is placed over the connecting part 21 so that their respective conical surfaces 21d, 22d touch each other. Next, the lower surrounding connecting part 22b is axially tightened by means of a number of bolts 24  
5 that are circumferentially positioned around the lower surface of the lower connecting part 22b. The bolts 24 extend upward into threaded holes in the lower surrounding connecting part 22b. Tightening of the bolts 24 cause wedging action between the conical surface 22d of the lower surrounding connecting part 22b and the lower conical surface 21d of the connecting part 21. Thus the connecting part 21 having the ribs 21a is  
10 urged to secure fixed engagement with the grooves 16a in the receiving body 16 and forms a fixed connection therebetween.

Next, the upper surrounding connecting part 22a is put over the connecting part 21 such that their respective conical surfaces 21c, 22c touch each other. Similar to the lower  
15 connecting part 22b, the tightening of a upper set of bolts 26 will cause wedging action between the conical surface 22c of the surrounding connecting part 22a and the conical surface 21c of the connecting part 21. Thus the connecting part 21 having the ribs 21b is urged to secure fixed engagement with the grooves 20a of the connecting point 20 and forms a fixed connection therebetween.

20

Fig. 5A and 5B illustrate, viewed from above and below, the end termination of a bundle of strands 5 having respective terminating sleeves 9 as it appears when free-standing, i.e. without the receiving body 16 installed.

P a t e n t   c l a i m s

1.

An end termination means for tension legs (10; 10') of non-metallic materials like  
5 composite material, which tension leg (10; 10') is constructed of a number of strands  
(5;5', 6) that constitute the load carrying elements of the tension leg (10; 10'), which  
strands (5;5', 6) are twisted (laid) about the longitudinal axis of the tension leg (10; 10')  
by a predetermined laying length and each strand (5;5', 6) is in turn constructed of a  
plurality of rods (7;7') of composite material having embedded strength fibres where the  
10 rods (7;7') are twisted about each other like in a wire rope, and the strands (5;5', 6)  
terminate near a receiving body (16) having connecting means and a number of  
through-going apertures enclosing the respective strands, **characterised in that** each  
strand (5;5', 6) is passed through respective aperture (8) in the receiving body (16)  
without being fixed therein, that each strand (5;5', 6) has a free end terminating some  
15 distance above the receiving body (16), and that the free end of each strand (5;5', 6) is  
fixed to and enclosed by a terminating sleeve (9) having a diameter larger than a  
corresponding aperture (8) in the receiving body (16), which terminating sleeve (9) is  
loosely resting on or abutting the receiving body (16).

20 2.

The end termination means according to claim 1, **characterised in that** the terminating  
sleeve (9) is internally tapered in a direction towards the receiving body (16).

3.

25 The end termination means according to claim 1 or 2, **characterised in that** a guiding  
sleeve (11) is arranged within each aperture (8) of the receiving body (16).

4.

30 The end termination means according to claim 3, **characterised in that** the guiding  
sleeve (11) is shorter than the length of the aperture (8) of the receiving body (16).

5.

The end termination means according to claim 4, **characterised in that** the guiding sleeve (11) is arranged within the aperture (8) close to the entrance of the strands (5;5', 6) into the receiving body (16).

5

6.

The end termination means according to any of the claims 1-5, **characterised in that** each aperture (8) through the receiving body (16) terminates in a concentric recess (12) for receipt of and to act as a guide and seat for the terminating sleeve (9).

10

7.

The end termination means according to claim 6, **characterised in that** each recess (12) has a depth (B) that is longer than the distance (A) that a terminating sleeve (9) is able to move out of the receiving body (16).

15

8.

The end termination means according to any of the claims 1-7, **characterised in that** the end termination (15) comprises an embracing element (17) that is spaced apart from the receiving body (16) and keeps the strands (5;5', 6) together, that between the embracing element (17) and the receiving body (16) the strands (5;5', 6) extend less radial restriction and in a substantially natural direction towards and into the apertures (8) of the receiving body (16).

20

9.

The end termination means according to claim 8, **characterised in that** the receiving body (16) acts as a gathering element for the strands (5;5', 6) between the embracing element (17) and the terminating sleeve (9).

25

10.

The end termination means according to any of the claims 1-9, **characterised in that** the apertures (8) of the receiving body (16) are somewhat inclined relative to the longitudinal axis of the tension leg (10) and the inclination corresponds to the natural

30



direction of the strands (5,5', 6) between the embracing element (17) and the terminating sleeves (9).

11.

- 5    The end termination means according to any of the claims 1-10, **characterised in that** the end termination (15) comprises an external rigid sleeve (18) fixed at one end thereof to the receiving body (16) and in its other end to the embracing element (17).

12.

- 10   The end termination means according to any of the claims 1-11, **characterised in that** the receiving body (16) on its external surface has at least one annular groove (16a) for engagement with at least one first annular rib (21a) on a connecting part (21) that is connected to a connecting point (20).

- 15   13.

A coupling for use between an end termination and a connecting point according to claim 12, **characterised in that** the connecting point (20) has at least one external annular groove (20a) for engagement with at least one second annular rib (21b) arranged on the connecting part (21) a distance apart from the at least one first rib (21a),  
20   which connecting part (21) is radially fixed by an upper and lower embracing connecting part (22a, 22b).

14.

- A coupling for use between an end termination and a connecting point according to  
25   claim 13, **characterised in that** an upper and lower radially outer surface (21c, 21d) on the connecting part (21) has an upward directed conical form and an upper and lower radially inner surface (22c, 22d) on the respective embracing connecting parts (22a, 22b) has complementary conical form.

- 30   15.

A coupling according to claim 13 or 14, **characterised in that** the connecting parts (20a, 22b) comprise respective pin screws (23a, 23b) for temporary fixation of the

connecting parts (22a, 22b) to the connecting point (20) and the receiving body (16) respectively.

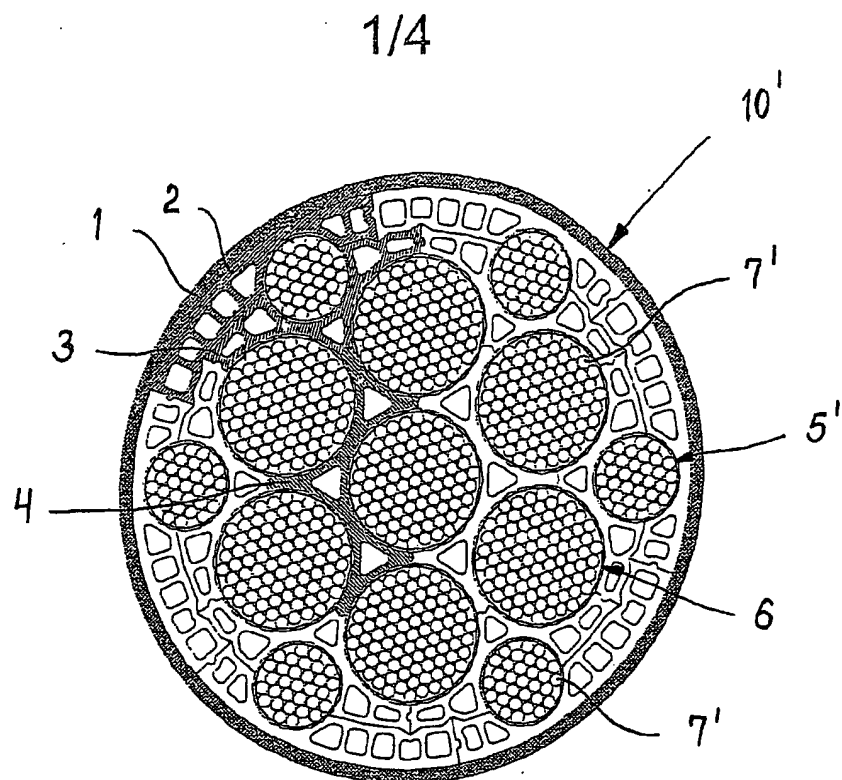


Fig.1.

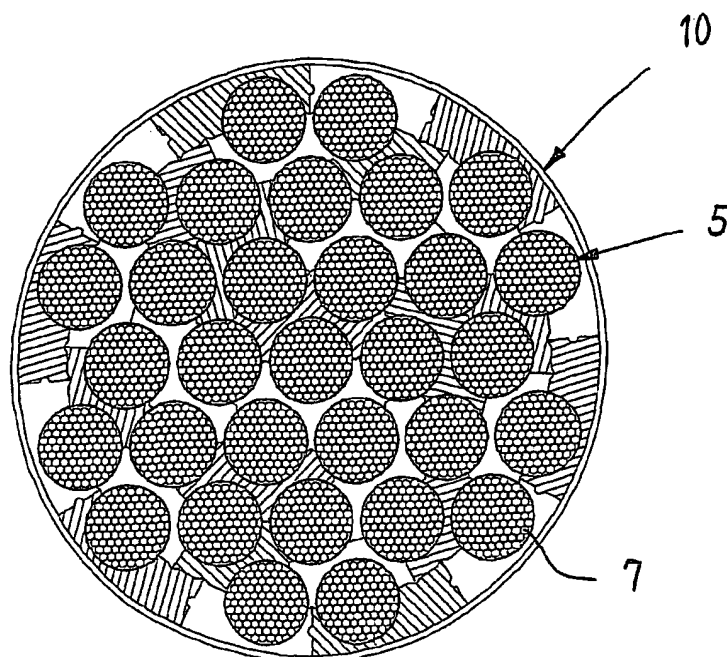


Fig.6.

2/4

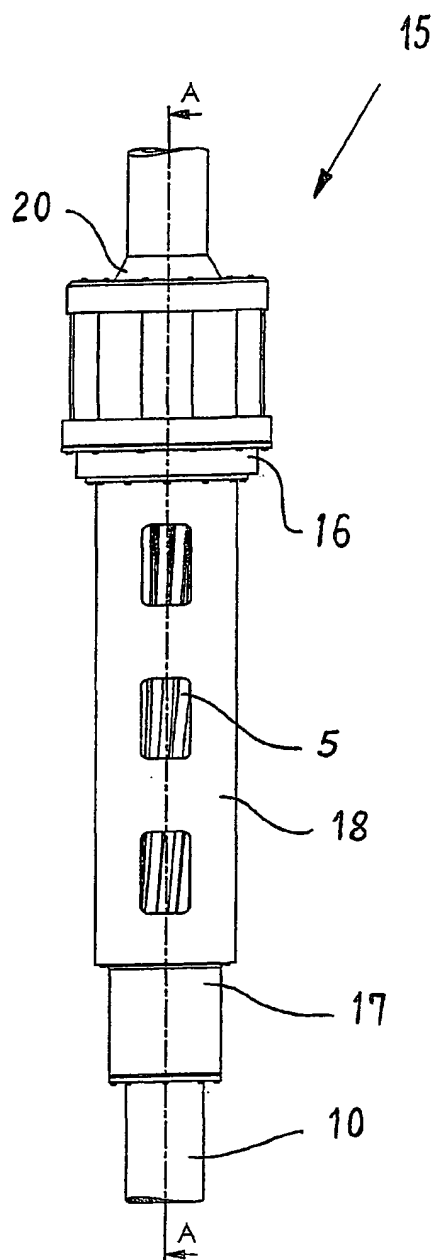


Fig.2.

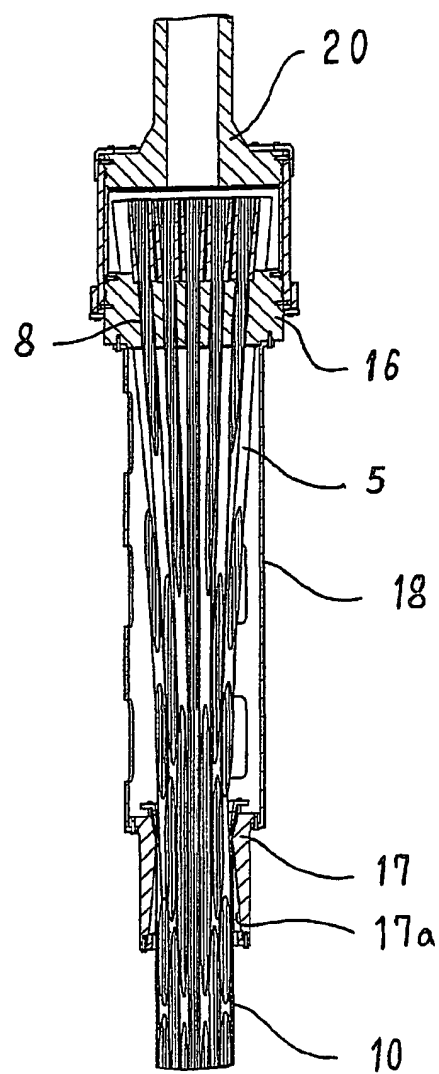


Fig.3.

3/4

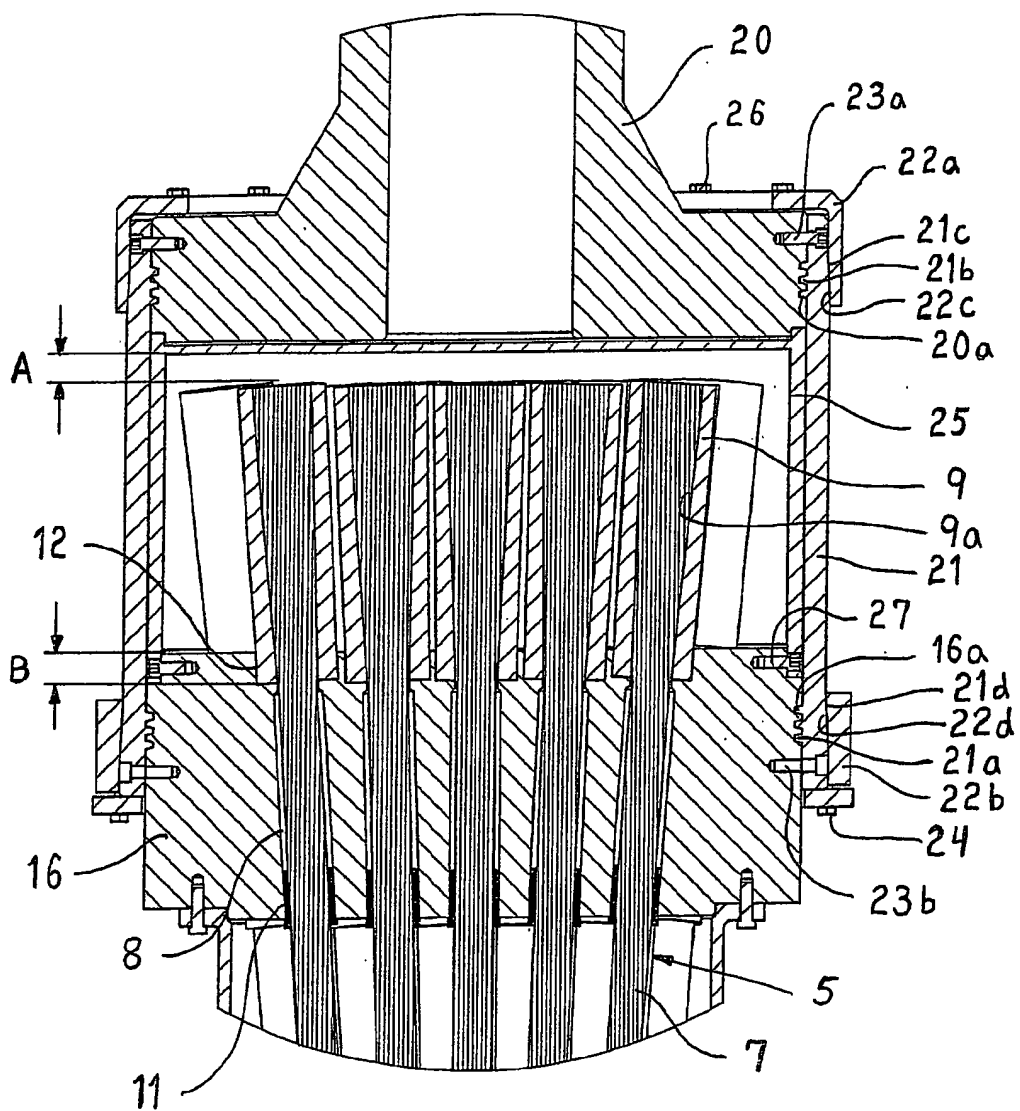


Fig.4.

4/4

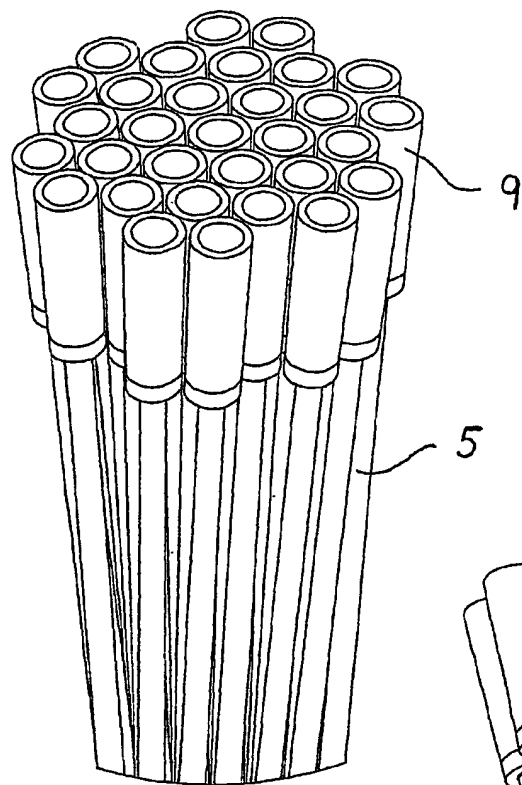


Fig.5A.

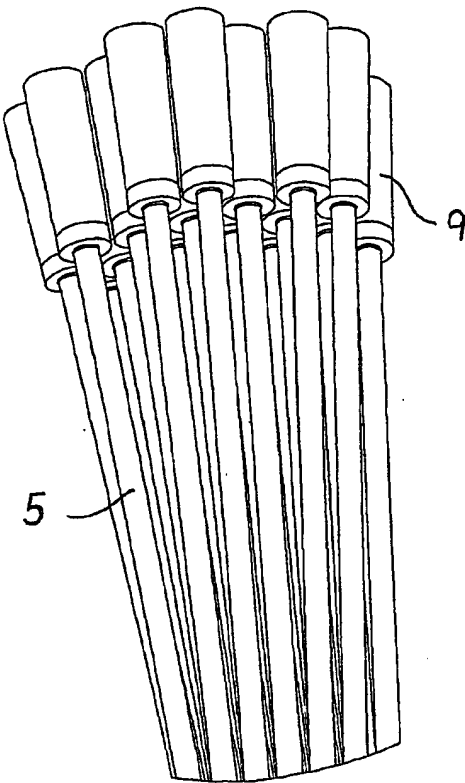


Fig.5B.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 03/00019

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E04C 5/12, B63B 21/50, E01D 19/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E04C, B63B, E01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9839532 A1 (KVAERNER OILFIELD PRODUCTS A.S), 11 Sept 1998 (11.09.98), page 5, line 5 - line 17, figures 1-6, abstract --	1-12
A	US 4068963 A (A. BRANDESTINI), 17 January 1978 (17.01.78), column 2, line 66 - column 3, line 27, figure 3 --	1-12
A	US 3351320 A (J.T.C. HARVEY), 7 November 1967 (07.11.67), column 1, line 26 - line 37; column 2, line 61 - column 3, line 27, figures 1-11 --	1-12

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

16 April 2003

Date of mailing of the international search report

22-04-2003

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Ingemar Hedlund / MRO  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 03/00019

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3866273 A (A. BRANDESTINI ET AL), 18 February 1975 (18.02.75), figures 1,2, abstract  --	1-12
P,A	WO 02057560 A1 (KVAERNER OILFIELD PRODUCTS AS), 25 July 2002 (25.07.02), figures 1-5, abstract  -- -----	1-15



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

29/03/03

International application No.

PCT/NO 03/00019

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9839532	A1	11/09/98	AU	6425098 A	22/09/98
				BR	9808838 A	04/07/00
				GB	2337541 A,B	24/11/99
				GB	9921129 D	00/00/00
				NO	304904 B	01/03/99
				NO	971053 A	08/09/98
				NO	304438 B	14/12/98
				NO	971054 A	08/09/98
US	4068963	A	17/01/78	AR	209551 A	29/04/77
				AU	516552 B	11/06/81
				AU	2165877 A	03/08/78
				BR	7700752 A	08/11/77
				CH	608059 A	15/12/78
				DE	2700378 A	11/08/77
				ES	235791 U,Y	16/06/78
				FR	2340484 A,B	02/09/77
				GB	1571327 A	16/07/80
				IT	1117663 B	17/02/86
				JP	52097065 A	15/08/77
				NL	7700822 A	11/08/77
				NO	146918 B,C	20/09/82
				NO	770287 A	10/08/77
				SE	425517 B,C	04/10/82
				SE	7700728 A	10/08/77
US	3351320	A	07/11/67	BR	6788177 D	00/00/00
				CH	455218 A	28/06/68
				DE	1609845 A,B,C	16/09/71
				ES	338721 A	00/00/00
				FI	45087 B	30/11/71
				FR	1517292 A	15/03/68
				GB	1125176 A	28/08/68
				JP	50010050 B	18/04/75
				NL	6704369 A	02/10/67
				NO	121176 B	25/01/71
				SE	332290 B	01/02/71

# INTERNATIONAL SEARCH REPORT

Information on patent family members

29/03/03

International application No.

PCT/NO 03/00019

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	3866273	A	18/02/75	AR	206288 A	15/07/76
				AT	39273 A	15/05/75
				AT	327982 B	25/02/76
				AU	470412 B	18/03/76
				AU	5126473 A	25/07/74
				BE	794024 A	02/05/73
				BR	7300406 D	00/00/00
				CA	983243 A	10/02/76
				CH	541693 A	15/09/73
				DE	2300943 A,C	02/08/73
				DK	146742 B,C	19/12/83
				ES	410547 A	01/12/75
				FR	2168792 A	31/08/73
				GB	1418763 A	24/12/75
				HK	53479 A	10/08/79
				IT	976568 B	10/09/74
				JP	1089410 C	23/03/82
				JP	48082637 A	05/11/73
				JP	56012643 B	24/03/81
				NL	182659 B,C	16/11/87
				NL	7300674 A	24/07/73
				NO	138966 B,C	04/09/78
				SE	395495 B,C	15/08/77
				ZA	7300379 A	28/11/73
<hr/>						
WO	02057560	A1	25/07/02	NO	20006643 A	24/06/02
<hr/>						

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**